

Main Material
MD-F: CFRETFE
MD-V: CFRPVDF



Corrosive Liquid and High Specific Gravity Liquid
Small Magnet Pump with No Liquid Leakage

With Excellent Corrosion Resistance Safely Transferring Strong Acids, Strong Alkalies, Organic Solvents, Etc.



High Corrosion-Resistance

The combination of the MD-F series with CFRETFE wet ends and the MD-V series with CFRPVDF wet ends covers most chemicals including strong acid/alkaline.



Viscosity Responsiveness

The MD-F series is designed to pump highly viscous liquids such as strong acid. Three types of impellers are selectable according to liquid viscosity.

MD-F



MD-15F



MD-30F



MD-55F



MD-100F

MD-15F·30F

CFRETFE
50/60Hz

- Max. Capacity **9/10 - 13/15** L/min
- Max. Head **3/3.1 - 8/11** m

MD-55F·100F


CFRETFE
50/60Hz

- Max. Capacity **60/55 - 125/135** L/min
- Max. Head **5.4/6.0 - 10.5/11.5** m



Operating principle

The centrifugal pump is driven by a pair of magnets which are incorporated in the impeller and motor shaft. The sealless pump structure eliminates shaft seals such as conventional mechanical seals because the pump chamber is shielded by the casings and the impeller is operated by the magnets. The combined coupling torque of the drive magnet and impeller magnet gives sufficient driving power against the motor torque.



Leak Free

Magnetically-driven seal-less pumps are free from leak problems and the need of seal replacement. This feature and its compact nature offer the best fit in built-in applications.



Ease of Maintenance

The pump unit is comprised of a small number of subunits, so that maintenance is significantly eased.

MD-V



MD-6KV



MD-15V



MD-20V



MD-30V



MD-70RV

MD-6KV

CFRPVDF
50/60Hz

- Max. Capacity **8.0/9.0** L/min
- Max. Head **1.0/1.4** m

MD-15V·20V·30V

CFRPVDF
50/60Hz

- Max. Capacity **10/11 - 32/38** L/min
- Max. Head **2.4/3.4 - 8.0/11** m

MD-70V

CFRPVDF
50/60Hz

- Max. Capacity **40/43 - 86/97** L/min
- Max. Head **6.7/9.7 - 14.3/20.3** m

Extensive Product Range According to Chemical Liquids

High s.g. /High-Head types are Available.


Outline of the Series

Main Material	Models	Max. Capacity (L/min)							Max. Head (m)				Limit of specific gravity
		20	40	60	80	100	120	140	5	10	15	20	
CFR ETFE	MD-15FX Low S. G. type	50Hz	10						4.1				1.4 Note
	MD-15FY Middle S. G. type	50Hz	9						3				2.2 Note
		60Hz	10						4				1.4 Note
	MD-15FZ High S. G. type	60Hz	10						3.1				2.1 Note
	MD-30FX Low S. G. type	50Hz	13						8				1.7 Note
		60Hz	15						11				1.5 Note
	MD-30FY Middle S. G. type	50Hz	10						6				2.2 Note
		60Hz	12						8				1.7 Note
	MD-30FZ High S. G. type	60Hz	11						7				2.1 Note
	MD-55FX Low S. G. type	50Hz	65						7.8				1.5 Note
		60Hz	60						5.4				2.2 Note
	MD-55FY Middle S. G. type	50Hz	65						7.8				1.5 Note
		60Hz	55						6.0				2.2 Note
CFRP VDF	MD-6KV Standard type	50Hz	8.0						1.0				1.2
		60Hz	9.0						1.4				1.2
	MD-15RV Standard type	50Hz	16						2.4				1.3
		60Hz	19						3.4				1.3
	MD-20RZV High head type	50Hz	10						4.9				1.1
		60Hz	11						6.9				1.1
	MD-30RV Standard type	50Hz	32						3.8				1.3
		60Hz	38						5.4				1.3
	MD-30RZV High head type	50Hz	15						8.0				1.1
		60Hz	17						11				1.1
	MD-70RV Standard type	50Hz	86						6.7				1.0
		60Hz	97						9.7				1.0
	MD-70RZV High head type	50Hz	40						14.3				1.0
		60Hz	43						20.3				1.0

Note: Please select from performance curve. (Limit of specific gravity varies depending on specification point.)



Construction

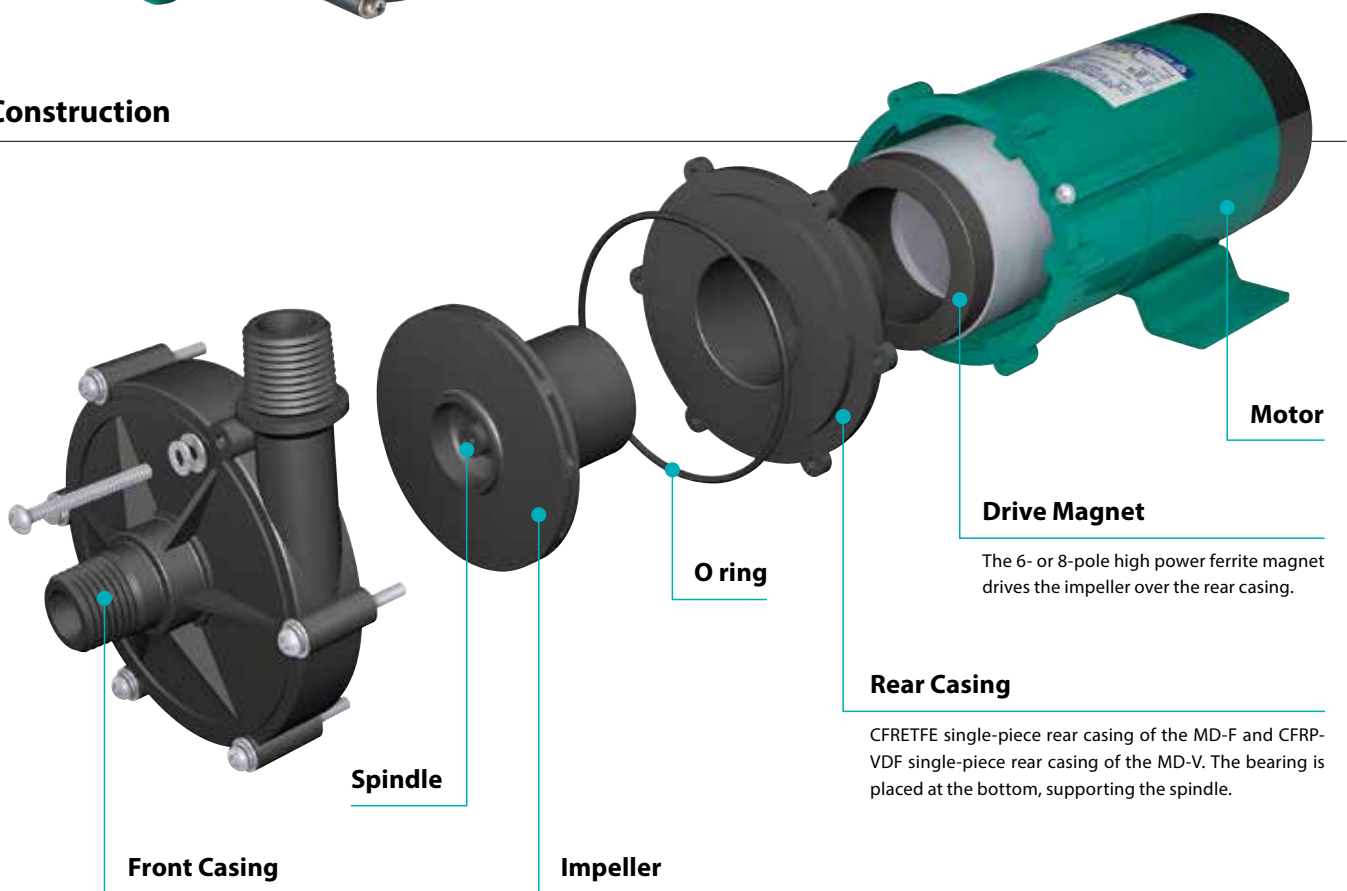

Front Casing

MD-F CFRETFE injection mold of the safety thread connection type.

MD-V CFRPVDF hose connection is available as well as thread connection. Also union joints can be installed for the thread connection types.

Note: For the 6KV-N and 15RV-N, the thread connection type is not available.



Hose connection type

Thread connection type

Impeller

MD-F CFRETFE single-piece closed impeller. Three impeller types (X • Y • Z) are available according to specific gravity.



X: Low S.G. impeller

Y: Middle S.G. impeller

Z: High S.G. impeller
(60Hz only)

MD-V For the MD-V, the ferrite magnet is encapsulated into the CFRPVDF impeller. For the rotating spindle type, an alumina ceramic spindle is integrally molded with the impeller.

Note: The MD-6KV-N is a fixed spindle type.

Motor

Drive Magnet

The 6- or 8-pole high power ferrite magnet drives the impeller over the rear casing.

Rear Casing

CFRETFE single-piece rear casing of the MD-F and CFRPVDF single-piece rear casing of the MD-V. The bearing is placed at the bottom, supporting the spindle.

MD-15F·30F

CFRETFE
50/60 Hz

- Max. Capacity **9/10 - 13/15 L/min**
- Max. Head **3/3.1 - 8/11 m**



MD-15F

MD-30F

Specifications (50/60Hz)

Model	Type of Impeller	Thread connection Inlet/Outlet	Max. Capacity (L/min)	Max. Head (m)	S.G. ^{Note1}	Output (W)	Input ^{Note2} (W)	Power source	Mass (kg)
MD-15F	X	NPT1/2	10/-	4.1/-	1.4/-	10/-	38/-	100V/200V/ 220V - 240V Single phase	1.8
	Y		9/10	3/4	2.2/1.4	10/10	30/34		
	Z		-/10	-/3.1	-/2.1	-/10	-/31		
MD-30F	X	NPT1/2 or G3/4	13/15	8/11	1.7/1.5	45/45	70/90		3.5
	Y		10/12	6/8	2.2/1.7	45/45	70/90		
	Z		-/11	-/7	-/2.1	-/45	-/55		

• Temperature range: 0 - 80°C (Contact us for applications below zero.) • Limit of viscosity: 30 mPa·s (at 1.0 S.G.) • Ambient temperature: 0 - 40°C


• Motor type: Capacitor-run induction motor

Note1: Please select from performance curve. (The values in the table are the maximum values for the pump. Limit of specific gravity varies depending on specification point.)

Note2: The above values are for single-phase 100V.

Construction and Materials

Illustration shows model MD-30F

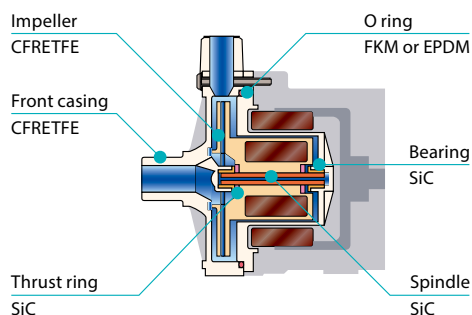



- CFRETFE Carbon fiber-reinforced ETFE
- SiC Silicon carbide ceramic
- FKM Fluorine rubber
- EPDM Ethylene propylene rubber

Pump Identification

MD - 30F G Z - 200 E N

- Pump size
15F, 30F
- Connection
No mark : NPT thread connection
G : G thread connection
- Impeller
X : Low S.G. type
Y : Middle S.G. type
Z : High S.G. type (60Hz)
- Motor
No mark : 100V single (Standard)
200 : 200V single (Special order)
220 : 220/240V single
- Material of O ring
No mark : FKM (Standard)
E : EPDM (Special order)

Performance Curves

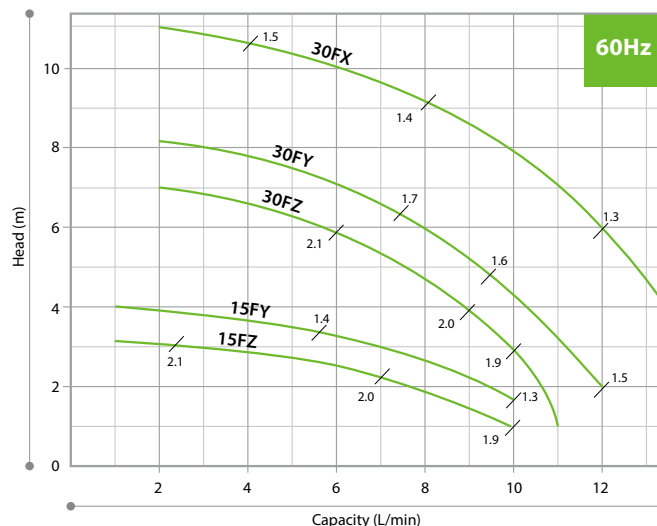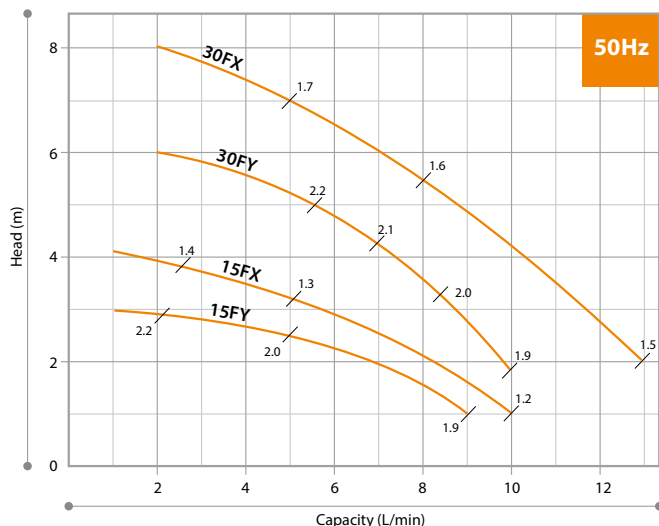

MD-55F·100F

CFRETFE
50/60 Hz

- Max. Capacity **60/55 - 125/135 L/min**
- Max. Head **5.4/6.0 - 10.5/11.5 m**

MD-55F



MD-100F



Specifications (50/60Hz)

Model	Type of Impeller	Thread connection Inlet/Outlet	Max. Capacity (L/min)	Max. Head (m)	S.G. ^{Note1}	Output (W)	Input ^{Note2} (W)	Power source		Mass (kg)
								Single phase	Three phase	
MD-55F	X	R1 or G1	65/-	7.8/-	1.5/-	90/-	170/-	100V/200V/ 220V-240V	-	5.4
	Y		60/65	5.4/7.8	2.2/1.5	90/90	130/170			
	Z		-/55	-/6.0	-/2.2	-/90	-/130			
MD-100F	X	R1 or G1	125/-	10.5/-	1.6/-	260/-	375/-		220V/380V/ 400V/440V	8.5
	Y		115/135	8.5/11.5	2.3/1.6	260/260	260/375			
	Z		-/115	-/8.5	-/2.2	-/260	-/285			

• Temperature range: 0 - 80°C (Contact us for applications below zero.) • Limit of viscosity: 30 mPa·s (at 1.0 S.G.) • Ambient temperature: 0 - 40°C


• Motor type: Capacitor-run induction motor

Note1: Please select from performance curve. (The values in the table are the maximum values for the pump. Limit of specific gravity varies depending on specification point.)

Note2: The above values are for single-phase 100V.

Construction and Materials

Illustration shows model MD-100F

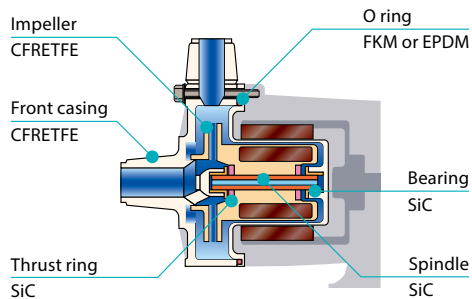

- **CFRETFE** Carbon fiber-reinforced ETFE
- **SiC** Silicon carbide ceramic
- **FKM** Fluorine rubber
- **EPDM** Ethylene propylene rubber

Pump Identification

MD - 100F G X
1 2 3

1 Pump size

55F, 100F

2 Connection

No mark : R thread connection

G : G thread connection

3 Impeller



X : Low S.G. type

Y : Middle S.G. type

Z : High S.G. type (60Hz)

Note: Specify the pump model and power specification at an inquiry phase.

Performance Curves

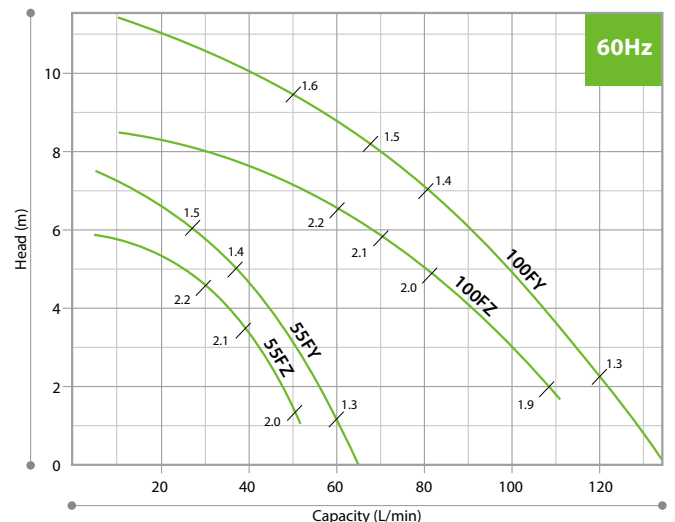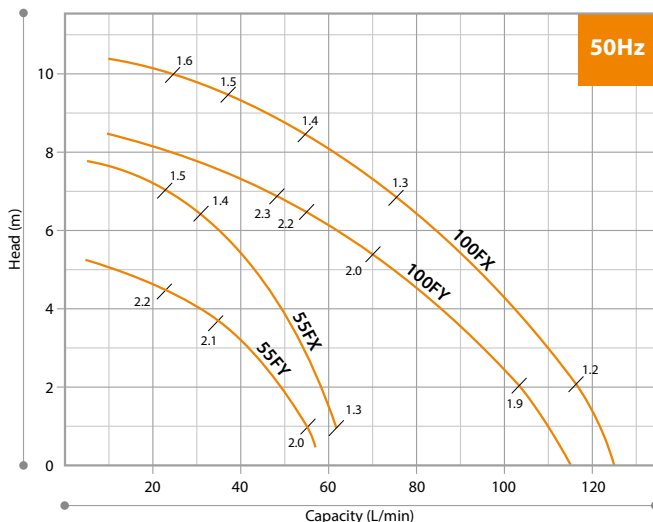

MD-6KV

CFRPVDF
50/60 Hz

- Max. Capacity **8.0/9.0** L/min
- Max. Head **1.0/1.4** m



MD-6KV

Specifications (50/60Hz)

Model	Hose connection		Max. Capacity (L/min)	Max. Head (m)	S.G.	Output (W)	Input (W)	Power source ^{Note}	Mass (kg)
	Inlet (mm)	Outlet (mm)							
MD-6KV	Ø14	Ø14	8.0/9.0	1.0/1.4	1.2	5/5	12/12	100V/200V, 220V - 240V, Single phase	0.9


• Temperature range: 0 - 80°C (Contact us for applications below zero.) • Limit of viscosity: 30 mPa.s (at 1.0 S.G.) • Ambient temperature: 0 - 40°C

• Motor type: Capacitor-run induction motor

Note : Single phase of 200V model is special order. Please contact us for details.

Construction and Materials

Illustration shows model MD-6KV

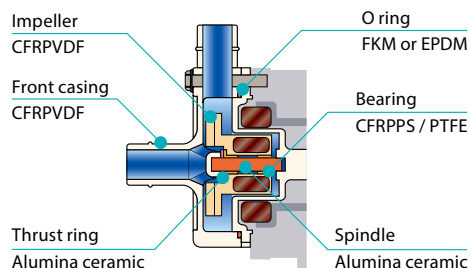

- **CFRPVDF** Carbon fiber reinforced polyvinylidene fluoride
- **CFRPPS** Carbon fiber reinforced polyphenylene sulfide
- **PTFE** Polytetrafluoroethylene ("Teflon", etc.)
- **FKM** Fluorine rubber
- **EPDM** Ethylene propylene rubber



Pump Identification

MD - **6K** **V** - **E** **N**

1 2 3

- 1 Pump size
6K
- 2 Material of casing
V : CFRPVDF
- 3 Material of O ring
No mark : FKM (Standard)
E : EPDM (Special order)

Performance Curves

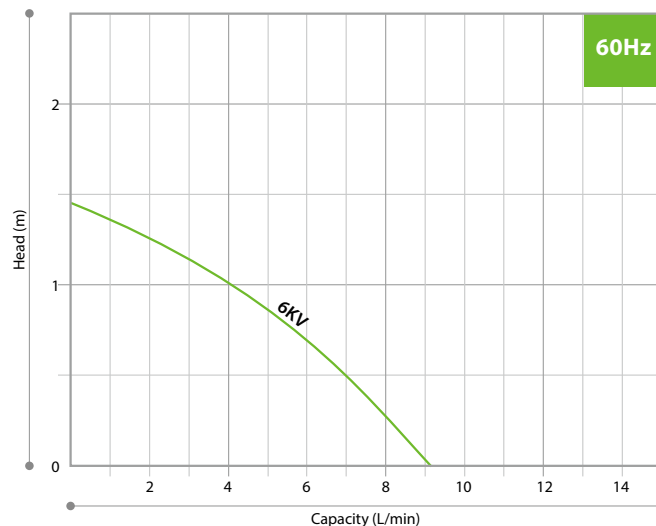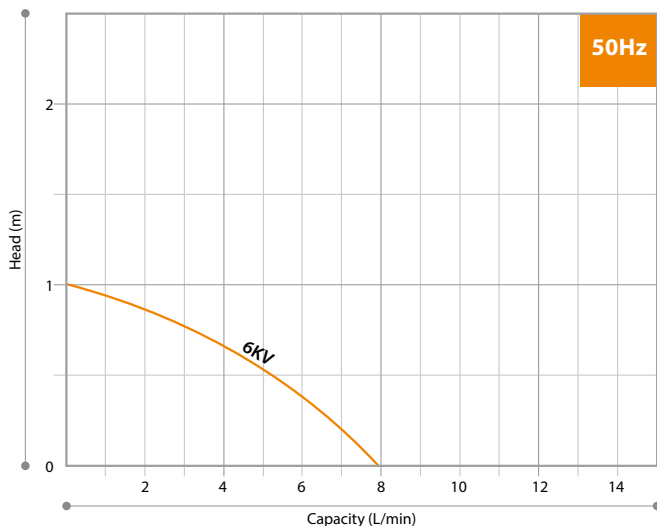

MD-15V·20V·30V

CFRPVDF
50/60 Hz

- Max. Capacity **10/11 - 32/38 L/min**
- Max. Head **2.4/3.4 - 8.0/11 m**



Specifications (50/60Hz)

Model	Hose connection RV · RZV		Thread connection RVM · RZVM		Max. Capacity (L/min)	Max. Head (m)	S.G.	Output (W)	Input (W)	Power source Note2	Mass (kg)
	Inlet (mm)	Outlet (mm)	Inlet/Outlet	Union Note1							
MD-15RV	Ø14	Ø14	—	—	16/19	2.4/3.4	1.3	10/10	26/31	100V/200V 220V - 240V Single phase	1.6
MD-20RZV	Ø17.5	Ø17	G3/4	13A	10/11	4.9/6.9	1.1	20/20	40/50		2.0
MD-30RV	Ø20	Ø20	G3/4	16A	32/38	3.8/5.4	1.3	45/45	60/80		3.5
MD-30RZV	Ø17.5	Ø17	G3/4	13A	15/17	8.0/11	1.0	45/45	70/90		3.5

• Temperature range: 0 - 80°C (Contact us for applications below zero.) • Limit of viscosity: 30 mPa·s (at 1.0 S.G.) • Ambient temperature: 0 - 40°C


• Motor type: Capacitor-run induction motor

Note 1: The union field shows the nominal diameter of the applicable VP vinyl chloride hose. Heat resistance of the standard union is 0 - 55°C and that of the heat resistant union is 0 - 80°C

Note 2: Single phase of 200V model is special order. Please contact us for details.

Construction and Materials

Illustration shows model MD-30RZV

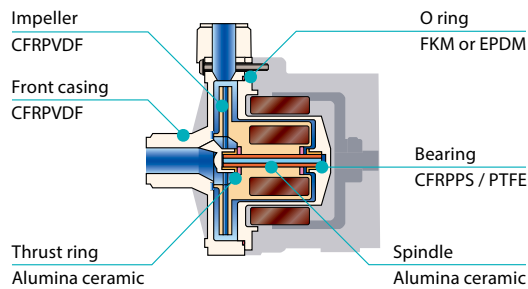

Note: Material of bearing for MD-20RZV and 30RZV are CFRPPS



- **CFRPVDF** Carbon fiber reinforced polyvinylidene fluoride
- **CFRPPS** Carbon fiber reinforced polyphenylene sulfide
- **PTFE** Polytetrafluoroethylene ("Teflon", etc.)
- **FKM** Fluorine rubber
- **EPDM** Ethylene propylene rubber

Pump Identification

MD - 30 RZ V M - 200 E N

- Pump size
15, 20, 30
- Type
R: Standard type
RZ: High head type
- Material of casing
V: CFRPVDF
- Connection
No mark: Hose type
M: G thread connection
- Motor
No mark: 100V single phase
200: 200V single phase
220: 220V - 240V single phase
- Material of O ring
No mark: FKM (Standard)
E: EPDM (Special order)

Performance Curves

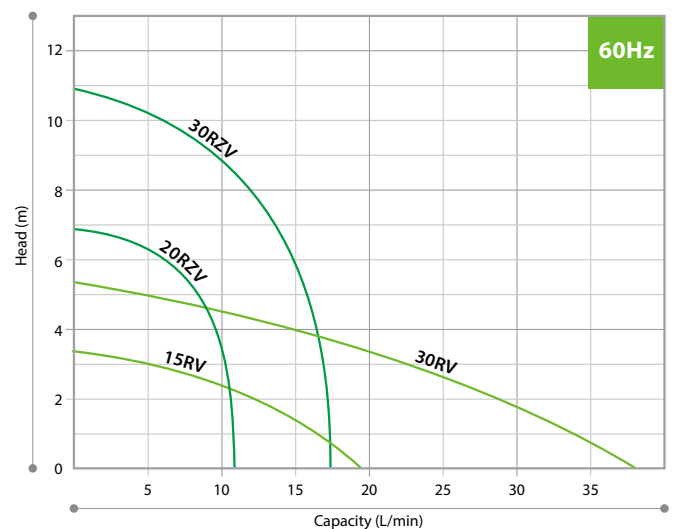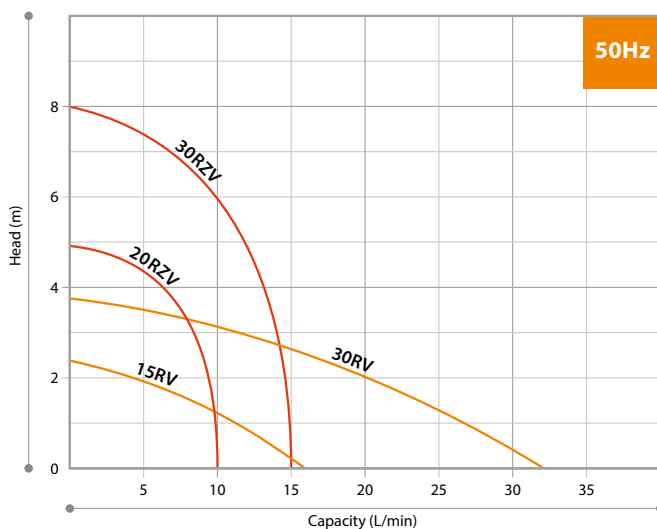

MD-70V

CFRPVDF
50/60 Hz

- Max. Capacity **40/43 - 86/97** L/min
- Max. Head **6.7/9.7 - 14.3/20.3** m



MD-70RV

Specification (50/60Hz)

Model	Hose connection		Thread connection		Max. Capacity (L/min)	Max. Head (m)	S.G.	Output (W)	Input (W)	Power source ^{Note2}	Mass (kg)
	RV - RZV		RVM - RZVM								
	Inlet(mm)	Outlet(mm)	Inlet/Outlet	Union ^{Note1}							
MD-70RV	Ø26	Ø26	G1	20A	86/97	6.7/9.7	1.0	150/180	235/365	100V/200V Single phase	6.0
MD-70RZV	Ø20	Ø20	G3/4	16A	40/43	14.3/20.3	1.0	180/216	275/395	220/240V Single phase, 220/380, 400/440V Three phase	6.0

• Temperature range: 0 - 80°C (Contact us for applications below zero.) • Limit of viscosity: 30 mPa·s (at 1.0 S.G.) • Ambient temperature: 0 - 40°C


• Motor type: Capacitor-run induction motor

Note 1: The union field shows the nominal diameter of the applicable VP vinyl chloride hose. Heat resistance of the standard union is 0 - 55°C and that of the heat resistant union is 0 - 80°C

Note 2: Single phase of 200V model is special order. Please contact us for details.

Construction and Materials

Illustration shows model MD-70RV

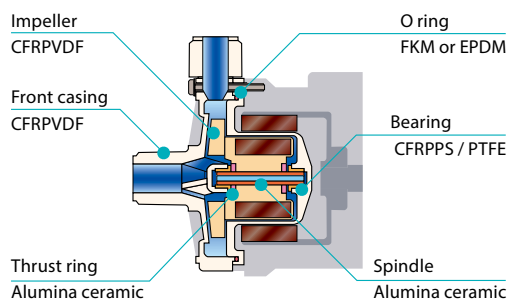

Note: Material of bearing for MD-70RZV is CFRPPS

- **CFRPVDF** Carbon fiber reinforced polyvinylidene fluoride
- **CFRPPS** Carbon fiber reinforced polyphenylene sulfide
- **PTFE** Polytetrafluoroethylene ("Teflon", etc.)
- **FKM** Fluorine rubber
- **EPDM** Ethylene propylene rubber

Pump Identification



MD - 70 R V M

1 2 3 4

- 1 Pump size
70
- 2 Type
R: Standard type
RZ: High head type
- 3 Material of casing
V: CFRPVDF
- 4 Connection
No mark: Hose type
M: G thread connection

Note: Specify the pump model and power specification at an inquiry phase.

Performance Curves

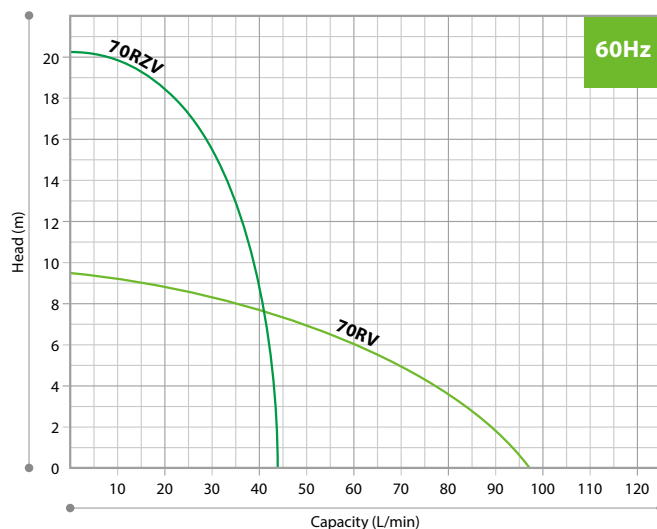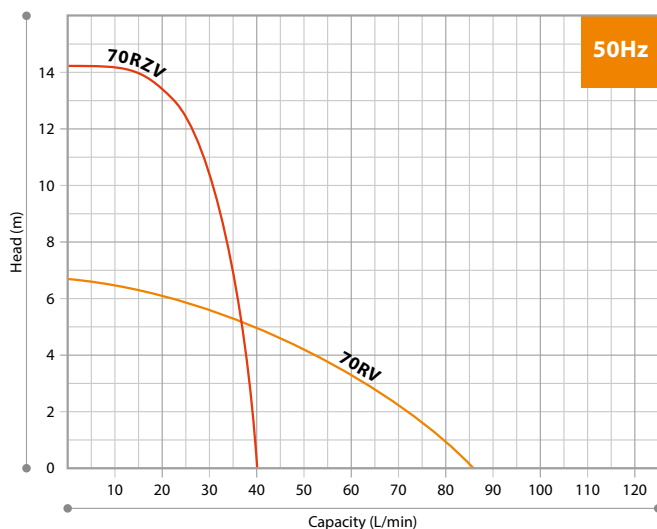

Special Accessories

• Union joint

Special-purpose union joints are available to cope with three types (13mm, 16mm and 20mm dia.) of piping. Tight sealing O-rings are used to prevent thread damage caused by over-tightening.



Specification


Model	13A	H13A	16A	H16A	20A	H20A
Material	PVC	HT-PVC	PVC	HT-PVC	PVC	HT-PVC
Range of temp.	0 - 55°C	0 - 80°C	0 - 55°C	0 - 80°C	0 - 55°C	0 - 80°C
Material of O ring	FKM or EPDM					

Dimensions in mm

MD-F

MD-15F, 30F

Illustration shows MD-30F




Model	W	H	L	a	b	c	d	e	f	g	i
MD-15F	95	120	186	—	50	68	55	34	29	99	2 - Ø5.6
MD-30F	120	130	231	40	64	100	60	39	39	120	4 - Ø9

Please contact us for G connection type.

MD-55F, 100F

Illustration shows MD-100F

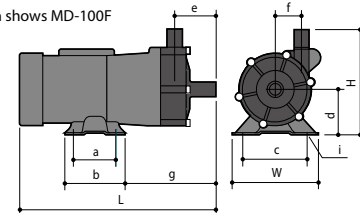


Model	W	H	L	a	b	c	d	e	f	g	i
MD-55F	120	155	270	40	64	100	65	58	40	163	4 - Ø9
MD-100F	156	174	320	70	100	110	75	63	43	145	4 - Ø9x27

Please contact us for G connection type.


MD-V

MD-6KV



MD-15RV, 30RV, 70RV

Illustration shows MD-30RV

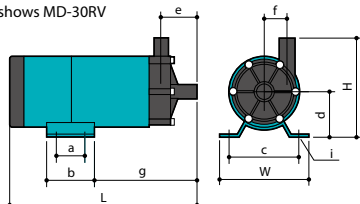


Model	W	H	L	a	b	c	d	e	f	g	i
MD-15RV	95	109 (114)	180 (179)	—	50	68	55	39	22	92	2 - Ø5.6
MD-30RV	120	130	248	40	64	100	60	48	31	137	4 - Ø9
MD-70RV	130	155	258	40	60	110	65	53	43	149	4 - 7x11

(): Thread connection type

MD-20RZV, 30RZV, 70RZV

Illustration shows MD-20RZV



Model	W	H	L	a	b	c	d	e	f	g	i
MD-20RZV	106	125	211	44	60	90	55	40	39	98	4 - 6x10
MD-30RZV	120	130	230	40	64	100	60			120	4 - Ø9
MD-70RZV	130	165	247	40	60	110	65	42	48	138	4 - 7x11

Precautions for pump selection

- The performance curves shown in this catalog are data for fresh water at 20 °C. The maximum discharge amount is the discharge amount when the lift is 0 m. The maximum head indicates the total head.
- The magnet pump cannot be operated continuously due. Be sure to plan to secure the minimum flow rate. Minimum pump flow rate = Maximum pump flow rate x 0.1 (Please contact us for details)
- Pump pressure limit = Pump maximum head x 1.5 (Please contact us for details.)
- The temperature range of the handling liquid is 0 to 80 °C. However, it depends on the conditions such as the heat cycle of the liquid to be handled. (Frozen liquid cannot be used.)

IWAKI CO., LTD.				6-6 Kanda-Sudacho 2-chome Chiyoda-ku Tokyo 101-8558 Japan TEL : (81)3 3254 2935 FAX : 3 3252 8892		IWAKI has global net work. Please find your distributor location at		www.iwakipumps.jp	
European Headquarter	IWAKI Europe GmbH	TEL: (49)2154 9254 0	FAX: (49)2154 9254 48	U.S.A.	IWAKI America Inc.	TEL: (1)508 429 1440	FAX: (1)508 429 1386		
Germany	IWAKI Europe GmbH	TEL: (49)2154 9254 50	FAX: (49)2154 9254 55	Brazil	IWAKI Do Brazil Comercio De Bombas Hidraulicas LTDA.	TEL: (55)19 3244 5900	FAX: (55)19 3244 5900		
The Netherlands (Netherlands Branch)	IWAKI Europe GmbH	TEL: (31)74 2420011	FAX: (49)2154 9254 48	China (Shanghai)	IWAKI Pumps (Shanghai) Co., Ltd.	TEL: (86)21 6272 7502	FAX: (86)21 6272 6929		
Italy (Italy Branch)	IWAKI Europe GmbH	TEL: (39)0445 561219	FAX: (39)0445 569088	China (Hong Kong)	IWAKI Pumps Co., Ltd.	TEL: (852)2607 1168	FAX: (852)2607 1000		
Spain (Spain Branch)	IWAKI Europe GmbH	TEL: (34)934 741 638	FAX: (34)934 741 638	China (Guangzhou)	GFTZ IWAKI Engineering & Trading Co., Ltd.	TEL: (86)20 84350603	FAX: (86)20 84359181		
Poland (East Europe Branch)	IWAKI Europe GmbH	TEL: (48)12 347 0755	FAX: (48)12 347 0900	Singapore	IWAKI Singapore Pte Ltd.	TEL: (65)6316 2028	FAX: (65)6316 3221		
Denmark	IWAKI Nordic A/S	TEL: (45)48 242345		Indonesia (Indonesia Office)	IWAKI Singapore Pte Ltd.	TEL: (62)21 6906606	FAX: (62) 21 6906612		
Finland	IWAKI Suomi Oy	TEL: (358)10 201 0490		Malaysia	IWAKim SDN. BHD.	TEL: (60)3 7803 8807	FAX: (60)3 7803 4800		
Norway	IWAKI Norge AS	TEL: (47)23 38 49 00		Korea	IWAKI Korea Co.,Ltd.	TEL: (82)2 6238 4800	FAX: (82)2 6238 4801		
Sweden	IWAKI Sverige AB	TEL: (46)8 511 72900		Taiwan	IWAKI Pumps Taiwan Co., Ltd.	TEL: (886)2 8227 6900	FAX: (886)2 8227 6818		
Belgium	IWAKI Belgium N.V.	TEL: (32)13 670200	FAX: (32)13 672030	Thailand	IWAKI (Thailand) Co.,Ltd.	TEL: (66)2 322 2471	FAX: (66)2 322 2477		
France	IWAKI France S.A.	TEL: (33)1 69 63 33 70	FAX: (33)1 64 49 92 73	Australia	IWAKI Pumps Australia Pty Ltd.	TEL: (61)2 9899 2411	FAX: (61)2 9899 2421		

()Country codes

 **Caution for safety use:** Before use of pump, read instruction manual carefully to use the product correctly. Actual pumps may differ from the photos. Specifications and dimensions are subject to change without prior notice. For further details please contact us.

 **Legal attention related to export.** Our products and/or parts of products fall in the category of goods contained in control list of international regime for export control. Please be reminded that export license could be required when products are exported due to export control regulations of countries. The posting and copying from this catalogue without permission is not accepted firmly.