



Magnetic drive process pump
Excellent corrosion resistance, durability, and safety

Excellent for heavy duty chemical process applications and abnormal operation

The MXM series are the fluoroplastic magnetic drive chemical process pumps with all the features of corrosion resistance, durability, and safety required for chemical pumps.

Iwaki unique safety design “Non contact system” and “Self radiation structure” offer the greatly improved resistance to abnormal operation.



Better withstanding difficult operating conditions


The proven non-contact system and self-radiating bearing structure deliver substantial improvements in tolerance of dry running and poor suction conditions.

Non contact system

Unlike conventional magnetic drive pumps, the MXM series are designed to prevent contact between the bearing and the rear thrust faces, even during dry running. By preventing contact, the rear thrust ring minimizes heat generation to prevent melting of plastic parts.

Self radiation structure

Through heat-dispersion holes provided in the fixed portions of the impeller and the magnet capsule, the liquid around the spindle and the bearing is forced to circulate so that heat generated by sliding can be reduced effectively. Thus, thermal deformation and melt are prevented.

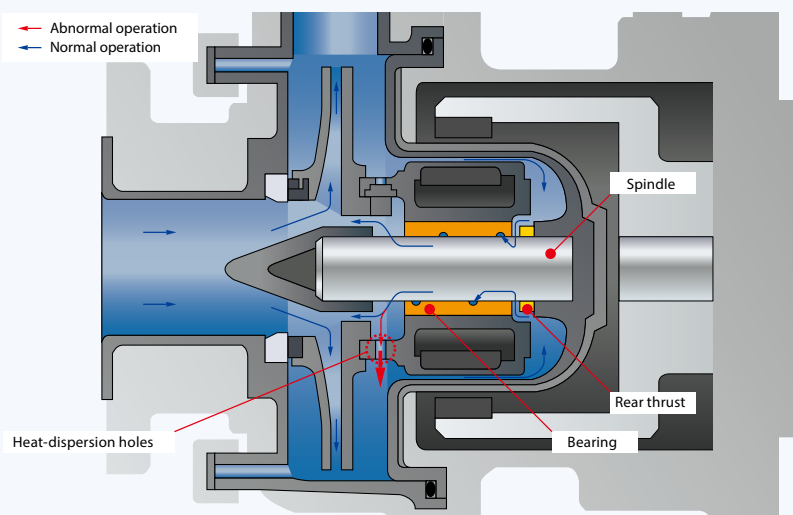

MXM545

MXM542



Exceptional corrosion resistance

The MXM series employ optimum anti-corrosive materials such as carbon fiber reinforced ETFE (CFRETFE), high quality ceramic and carbon for parts that come in contact with liquid. The most suitable impeller size and motor output can be selected for the required liquid property.



Impeller+Magnet capsule



Spindle+Bearing



Robust structure

The pumps have an external armour of high strength ductile cast iron for use in heavy duty chemical process applications. The sealing performance between the front casing and the rear casing is drastically enhanced by our original structure, offering high reliability.



Cover+Front casing



Enhanced safety

The MXM features a unique rear casing shape designed to prevent stress concentration. This increases both the pump's pressure resistance and the mechanical strength of the spindle support. The high temperature model uses a dual structure incorporating an FRP rear casing cover. In addition to further increasing the pump's pressure resistance, it improves safety with dual containment preventing liquid leakage in the event of unexpected damage to the rear casing.



Rear casing+Rear casing cover



MXM44




MXM22



Construction and materials

Material code	CF	FF	KK
Front casing	CFRETFE		
Rear casing			
Impeller			
Magnet capsule			
Spindle	High-purity alumina ceramic		SiC
Bearing	High-density carbon	High-purity alumina ceramic	
Liner ring	High-purity alumina ceramic		
Mouth ring	PTFE with filler		
Rear thrust	CFRETFE		
O ring	FKM/EPDM/FEPM/FFKM		
Gasket			
Lock pin	CFRETFE		
Note			

Note: 54 type only

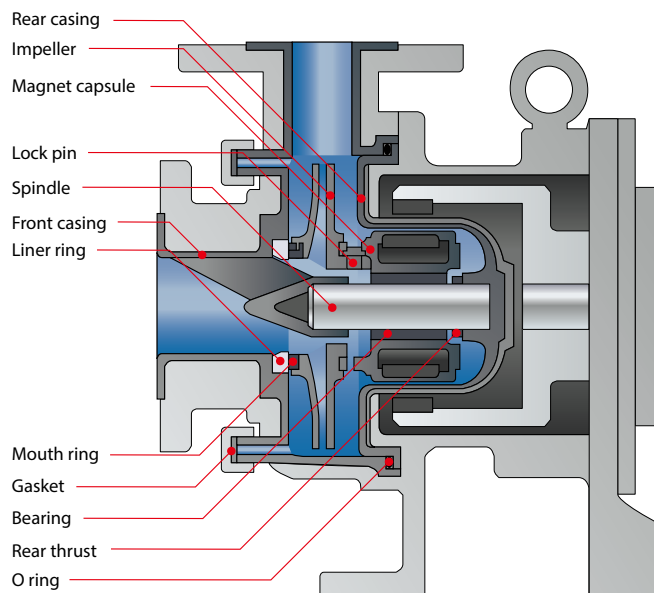

Specifications

Model	Pump size Suction × Discharge	50Hz			60Hz		
		Impeller size	Capacity L/min	Head m	Impeller size	Capacity L/min	Head m
MXM22 (Impeller range 1)	25mm × 25mm	100	150	7.5	080	150	6.5
		090	150	5.5	070	150	5
		070	150	2.5	—	—	—
MXM22 (Impeller range 2)		105	150	8	105	150	14
	—	—	—	090	50	12	
MXM44 (Impeller range 1)	40mm × 40mm	115	200	9.5	120	200	17
		110	200	8	105	200	11
		100	200	6	095	200	9.5
		090	200	5	085	200	7.5
		—	—	—	075	200	5
MXM44 (Impeller range 2)		130	200	12	130	100	25
MXM54 (Impeller range 1)	50mm × 40mm	150	200	18.5	150	200	30.5
		140	200	17	140	200	27.5
		120	200	13.5	—	—	—
MXM54 (Impeller range 2)		—	—	—	130	200	21.5
		—	—	—	120	200	19
		—	—	—	110	200	15
MXM54 (Impeller range 3)		150	300	20	130	300	26
		140	300	18.5	120	300	20.5
		130	300	16.5	—	—	—
		110	300	10.5	—	—	—
MXM54 (Impeller range 4)		150	400	25	150	200	41
		140	400	20.5	140	400	29.5
		125	400	15.5	130	400	25
		110	400	9.5	120	400	21.5

Note1: Liquid temp. range

Standard: -10 to 90 °C High temp. version (with rear casing cover): -10 to 105 °C (10 to 105 °C when FEPM O ring is used)

Note2: Max operating pressure

Standard MXM22: 0.2MPa, MXM44: 0.3MPa, MXM54: 0.45MPa High temp. version (with rear casing cover): 0.7MPa

Pump identification

1	2	3	4	5	6	7	8	9	10
MXM	54	2	-	150	1	E	CF	V	J - H
1 Series symbol MXM	5 Impeller range 1, 2, 3, 4			9 Standard for pipe connection and motor J : JIS flange + JIS motor I : ISO flange + IEC motor A : ANSI flange + JIS/IEC motor			10 Special code H : High temperature version (with rear casing cover) B : With base plate S : Other special order *Special code may overlap.		
2 Pump size (Suction × Discharge) 22 : 25mm×25mm 44 : 40mm×40mm 54 : 50mm×40mm	6 Main material E : CFRETFE			7 Material of Bearing / Spindle CF : High density carbon / High purity alumina ceramic FF : High purity alumina ceramic / High purity alumina ceramic KK : SiC / SiC					
3 Motor output 0 : 0.4kW 1 : 0.75kW 2 : 1.5kW 3 : 2.2kW 5 : 3.7kW	8 Material of O ring V : FKM E : EPDM A : FEPM P : FFKM								
4 Impeller size 150, 140, 130, 125, 120, 115, 110 105, 100, 095, 090, 085, 080, 075, 070									

Notes for selection

(1) The performance curves in this catalogue represent the data measured using clear water at 20 °C.

(2) Choose the pump model suited to the liquid gravity.

Make sure that the motor output is ten percent higher than theoretically required.

Shaft power (Sp) × liquid gravity × 1.1 < Motor output

(Note) The shaft power (Sp) increases in proportion to the liquid gravity.

As the viscosity rises, the shaft power is higher while the head and the discharge are lower.

The power and the performance need to be adjusted.

(3) No magnetic drive pump supports continuous closed running. Be sure to ensure the minimum flow volume.

• Minimum flow volume

MXM22/44 : 10 L/min.

MXM54 impeller range 1, 2 and 3 : 20 L/min.

Impeller range 4 : 50 L/min.

(4) The pressure resistance of the pump is as follows.

Be sure to ensure that the internal pressure of the pump does not exceed the value specified below.

• Standard model -10 °C to 90 °C (without rear casing cover)

MXM22: 0.2MPa, MXM44: 0.3MPa, MXM54: 0.45MPa

• High temperature version -10 °C to 105 °C (with rear casing cover)

: 0.7MPa

(5) FF material models

• Liquid should be 1m Pa·s (cP) or more.

• HQ performance is somewhat different from CF/KK models. If you need to know the detail, please contact with us.





(6) Deliberate prolonged dry running or entrained air operation is not recommended.

• The CF type has a degree of tolerance to dry running and operation with entrained air in the liquid.


• The KK type has the same degree of tolerance as the CF type under operation with entrained air in the liquid, but not allowed to run dry.

• The FF type is not allowed to run dry or operation with entrained air.


Performance curves

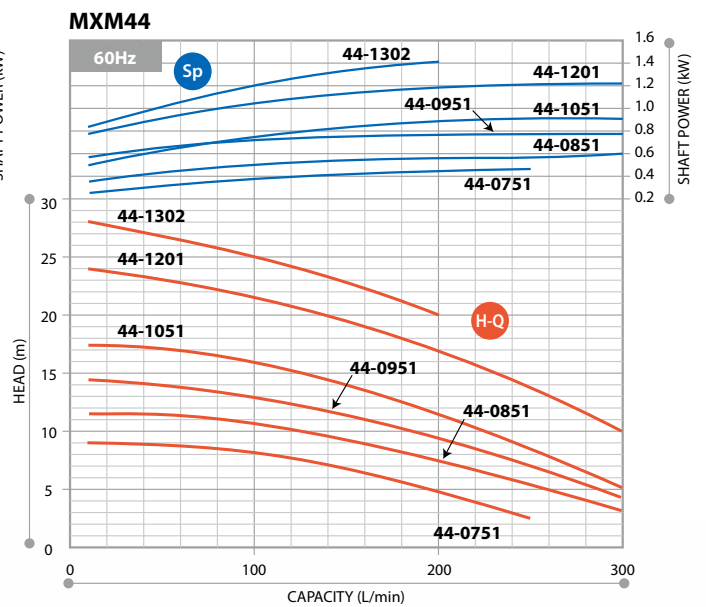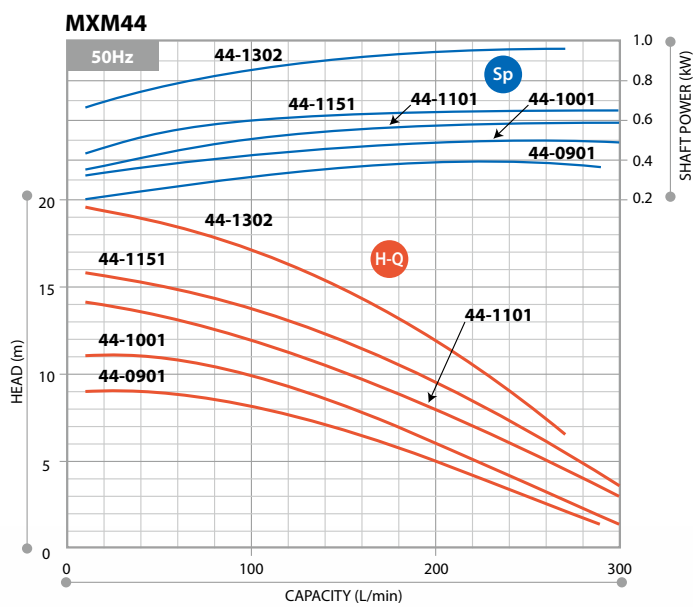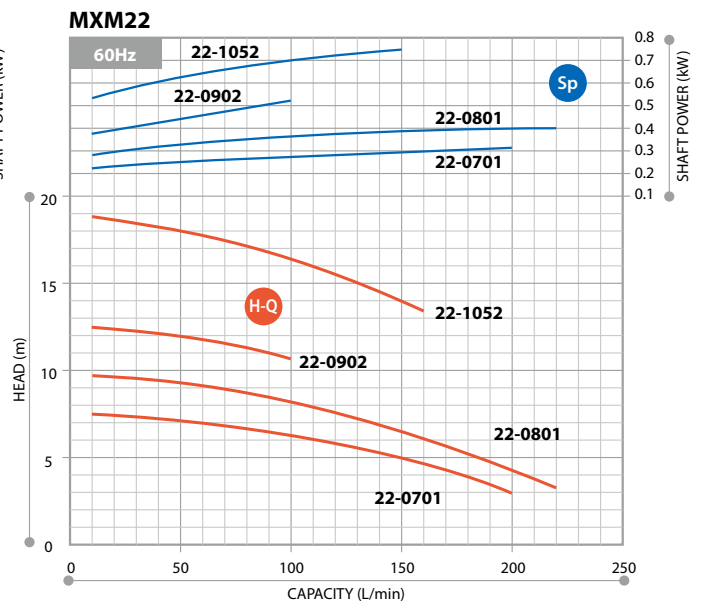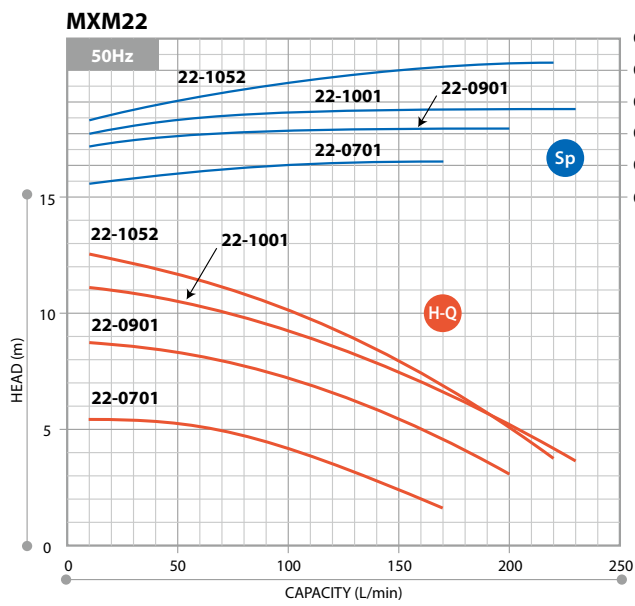


· The shaft power curves shown above are calculated by using our standard test motor. Contact us for detail.

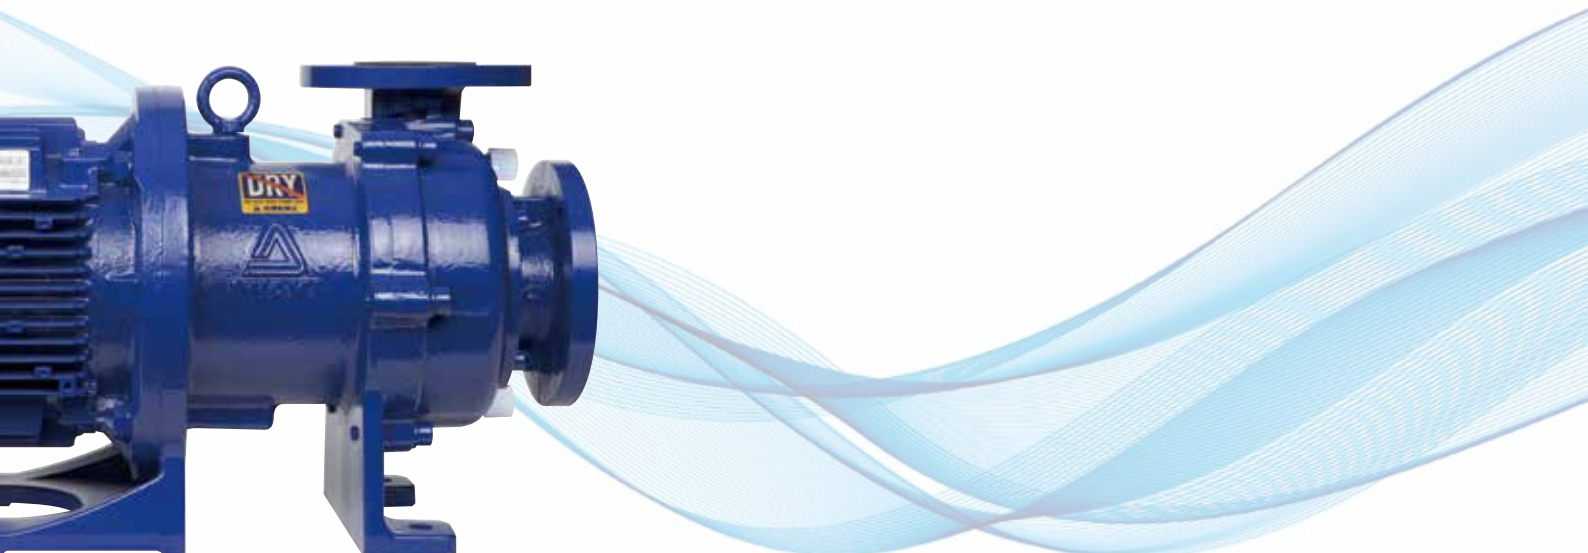


MXM54 (Impeller range 1)

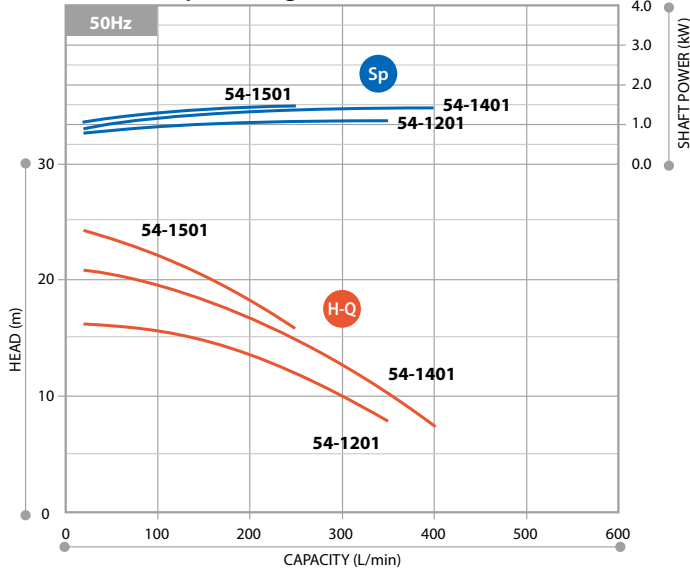


MXM54 (Impeller range 1, 2)

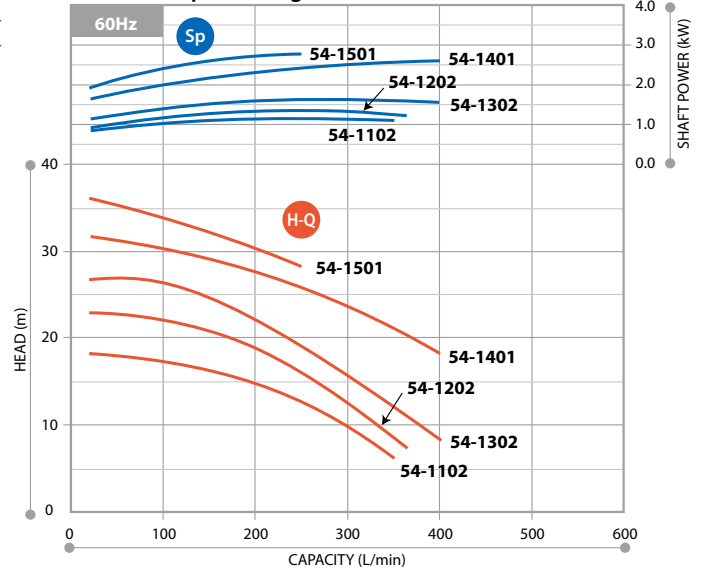


MXM54 (Impeller range 3)

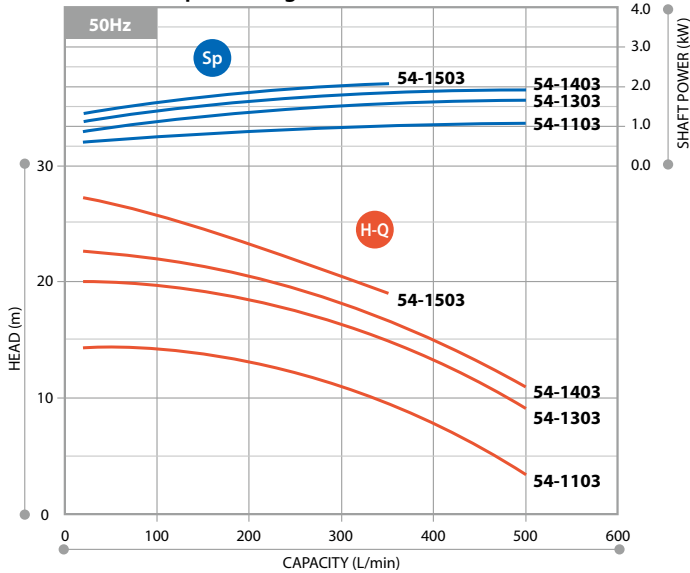


MXM54 (Impeller range 3)

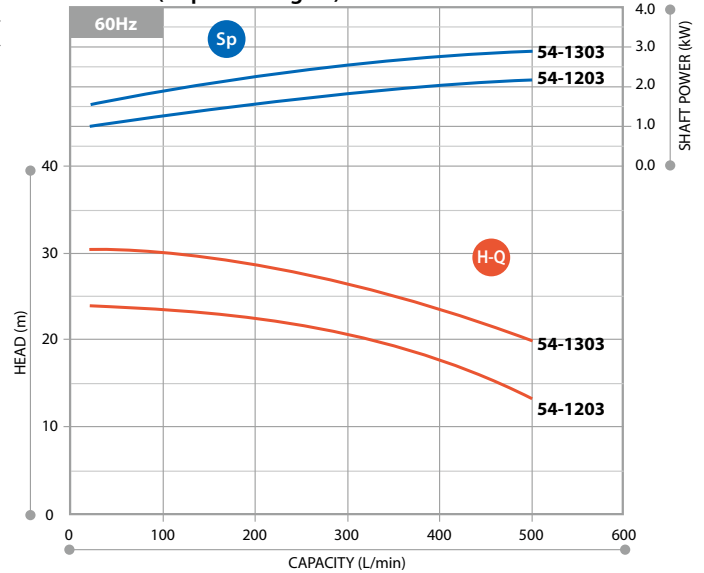

MXM54 (Impeller range 4)

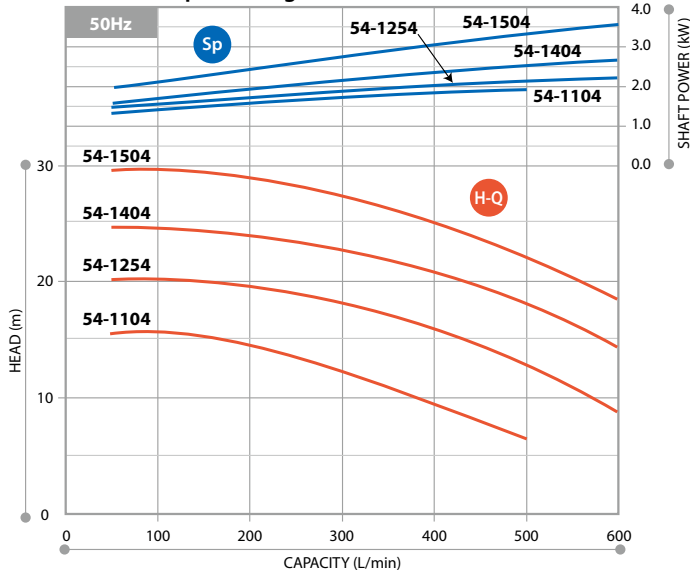


MXM54 (Impeller range 4)

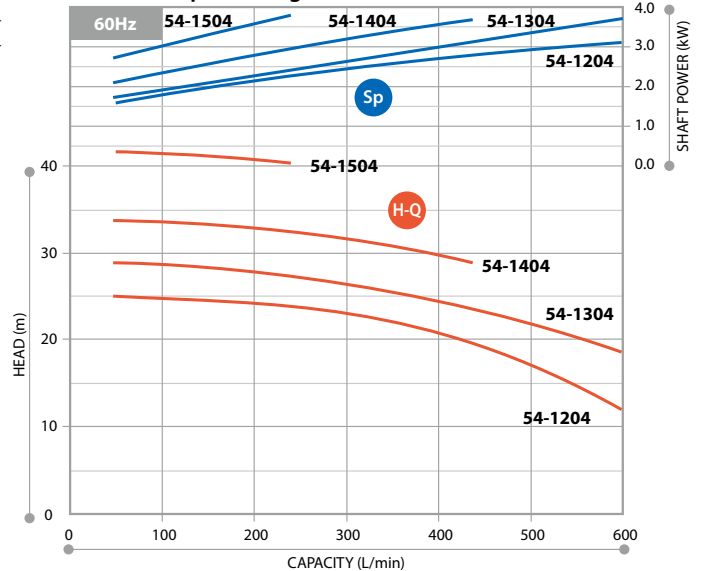


The shaft power curves shown above are calculated by using our standard test motor. Contact us for detail.

Dimensions in mm

Without base

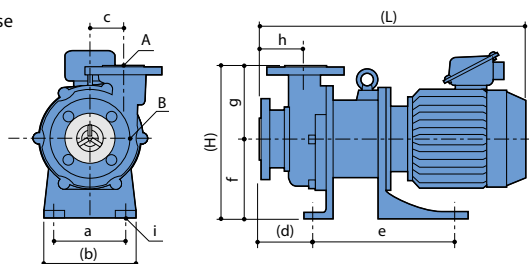

With base

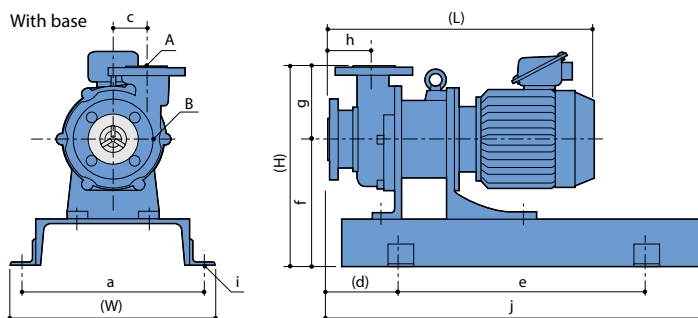

Without base

Model	(H)	(L)	A	B	a	(b)	c	(d)	e	f	g	h	i
MXM220	237	453	25A	25A	110	150	51	95	143	115	122	88	4-Ø12
MXM220-H		475							165				
MXM221		470											
MXM221-H													
MXM441	275	485	40A	40A	130	170	58	113	250	135	140	106	4-Ø14
MXM441-H		498											
MXM442		535											
MXM442-H													
MXM542	295	515	40A	50A	140	180	65	106	275	155	140	87	4-Ø14
MXM543		544											
MXM545		589											

With base

Model	(W)	(H)	(L)	A	B	a	c	d	e	f	g	h	i	j
MXM220	300	317	453	25A	25A	250	51	130	220	195	122	88	4-Ø19	450
MXM220-H			475											
MXM221			470											
MXM221-H														
MXM441	350	365	485	40A	40A	300	58	130	260	225	140	106	4-Ø19	489
MXM441-H			498											
MXM442			535											
MXM442-H														
MXM542	400	385	515	40A	50A	350	65	140	480	245	140	87	4-Ø19	735
MXM543			544											
MXM545			589											

Optional accessories

Iwaki pump protector DRN series

Detects unusual pump operating conditions including dry-running and overload

The DRN model protects equipment (including pumps) from damage!
Minimizes production downtime.

Identifies possible causes of alarms so they can be investigated and addressed.

Multiple Input	Two analog, one digital, one temperature input and one current input
Easy operation	Equipped with EASY setup mode to remember the operation status and set the lower/upper limit values, as well as AUTO setup mode
Bar graph	Visible indication of current operating status
Logging capability	Data log feature for preventative maintenance scheduling
Communication	RS485 external communication capability



Specifications

Model	DRN-01	DRN-02
Amperometric range	0.5-30.00A	5.0-200.0A
Unit's source voltage	AC100-240V 50/60Hz 10VA	
Operating temperature	0-40°C	
Operating humidity	35-85%RH	

IWAKI CO., LTD. 6-6 Kanda-Sudacho 2-chome Chiyoda-ku Tokyo 101-8558 Japan TEL: (81)3 3254 2935 FAX: 3 3252 8892

IWAKI has global net work.
Please find your distributor location at

www.iwakupumps.jp

European Headquarter Germany The Netherlands (Netherlands Branch) Italy (Italy Branch) Spain (Spain Branch) Poland (East Europe Branch) Denmark Finland Norway Sweden Belgium France	IWAKI Europe GmbH IWAKI Europe GmbH IWAKI Europe GmbH IWAKI Europe GmbH IWAKI Europe GmbH IWAKI Europe GmbH IWAKI Nordic A/S IWAKI Suomi Oy IWAKI Norge AS IWAKI Sverige AB IWAKI Belgium N.V. IWAKI France S.A.	TEL: (49)2154 9254 0 TEL: (49)2154 9254 50 TEL: (31)74 2420011 TEL: (39)0445 561219 TEL: (34)934 741 638 TEL: (48)12 347 0755 TEL: (45)48 242345 TEL: (358)10 201 0490 TEL: (47)23 38 49 00 TEL: (46)8 511 72900 TEL: (32)13 670200 TEL: (33)1 69 63 33 70	FAX: (49)2154 9254 48 FAX: (49)2154 9254 55 FAX: (49)2154 9254 48 FAX: (39)0445 569088 FAX: (34)934 741 638 FAX: (48)12 347 0900 FAX: (45)48 242345 FAX: (358)10 201 0490 FAX: (47)23 38 49 00 FAX: (46)8 511 72900 FAX: (32)13 672030 FAX: (33)1 64 49 92 73	U.S.A. Brazil China (Shanghai) China (Hong Kong) China (Guangzhou) Singapore Indonesia (Indonesia Office) Malaysia Korea Taiwan Thailand Australia	IWAKI America Inc. IWAKI Do Brazil Comercio De Bombas Hidraulicas LTDA. IWAKI Pumps (Shanghai) Co., Ltd. IWAKI Pumps Co., Ltd. GFIZ IWAKI Engineering & Trading Co., Ltd. IWAKI Singapore Pte Ltd. IWAKI Singapore Pte Ltd. IWAKim SDN. BHD. IWAKI Korea Co.,Ltd. IWAKI Pumps Taiwan Co., Ltd. IWAKI (Thailand) Co.,Ltd. IWAKI Pumps Australia Pty Ltd.	TEL: (1)508 429 1440 TEL: (55)19 3244 5900 TEL: (86)21 6272 7502 TEL: (852)2607 1168 TEL: (86)20 84350603 TEL: (65)6316 2028 TEL: (62)21 6906606 TEL: (60)3 7803 8807 TEL: (82)2 6238 4800 TEL: (886)2 8227 6900 TEL: (66)2 322 2471 TEL: (61)2 9899 2411	FAX: (1)508 429 1386 FAX: (55)19 3244 5900 FAX: (86)21 6272 6929 FAX: (852)2607 1000 FAX: (86)20 84359181 FAX: (65)6316 3221 FAX: (62) 21 6906612 FAX: (60)3 7803 4800 FAX: (82)2 6238 4801 FAX: (886)2 8227 6818 FAX: (66)2 322 2477 FAX: (61)2 9899 2421
---	---	---	--	---	--	--	---

() Country codes

Caution for safety use: Before use of pump, read instruction manual carefully to use the product correctly. Actual pumps may differ from the photos. Specifications and dimensions are subject to change without prior notice. For further details please contact us.

Legal attention related to export. Our products and/or parts of products fall in the category of goods contained in control list of international regime for export control. Please be reminded that export license could be required when products are exported due to export control regulations of countries. The posting and copying from this catalogue without permission is not accepted firmly.