

**Brushless DC Canned Pumps  
for a Wide Variety of Uses**



# Small Canned Motor Centrifugal Pumps Powered by Brushless DC Motors

They are incredibly compact, lightweight, quiet and feature seal less construction designed to eliminate the potential for leakage.

The models in the NRD series offer a wider range of options with their flow adjustment feature (1 to 5VDC), support for high-temperature liquid 0°C to 80°C, and capacity to be installed in areas with high ambient temperature 0°C to 50°C.

In addition, tachometer feedback (rotation speed pulse output<sup>Note1</sup>) and variable input signal are available at the same time.

Note1: NRD-08Z-P4//70/70X/100/100X/100H only. Open collector method Outputs at 1 pulse/rotation.



## Compact and Seal-Less Design

The canned motor design offers the most compact package available. This construction requires less space, while the seal-less design prevents liquid leakage and the need for seal replacement.



## Multiple Connection Types

There are four different port connection options available, Tube (Hose barb type), NPT Thread, R Thread or G Thread<sup>Note3</sup>. Select the option that best fits your location and installation.

Note3: NRD-40/40X/70/70X/100/100X/100H only.



Tube (Hose barb type)



R Thread



NPT Thread



G Thread



## Long Life

A Brushless DC motor is employed as the pump drive. This motor design eliminates pump/motor failures due to brush wear, ensuring a service life equal to AC motors.



## Flow Adjustment Feature and Built-in Drive Technology

An external input signal (1 to 5VDC or 400 Hz  $\pm$  10% of PWM, Duty 0 - 100%<sup>Note2</sup>) can be used to vary the flow rate. The NRD series models are also equipped with a built-in motor drive circuit. With this circuit, the power can be connected to variable external input to operate the pump.

Note2: NRD-08Z-P4//70/70X/100/100X/100H only. Connect the PWM control signal with an open collector (drain).



## Readily Compliant with Global Safety Standards

The NRD series power voltage is classified as safety voltage (50V or less), which allows the user to easily comply with global safety standards such as UL, CSA and CE. The DC power supply does not have a region-specific voltage or frequency, allowing for unified usage.



## High Temperature Environments

The pump can be installed in an environment with an ambient temperature of up to 50°C (08Z: 40°C). It can also pump fluids as warm as 80°C (08Z: 50°C, 100H: 70°C).



## Typical Applications

### Fuel Cells

Cogeneration systems  
(cooling and circulation)

### Medical

Biochemical analysis, Cooling systems  
Patient temperature management medical equipment  
Cooling for laser treatment  
Endoscope cleaning device

### Physical / Chemical Analysis

Thermostats, Pure water equipment  
Different types of analyzers

### Vending Machines

Dispensers

### Photo

X-ray film developing machines  
CT scan (Light source cooling)

### Semiconductors

Semiconductor cooling systems

### Surface Treatment

Small plating machines

### Solar Power Systems

Electric water heaters  
Solar battery heat collectors

### Projection


Projectors (Light source cooling)

## Operating Principle

Canned motor centrifugal pumps directly drive the rotor magnet that is coupled to the impeller.

The pump chamber is completely sealed from the exterior by a static o-ring. The impeller is driven by a rotating magnetic field that doesn't require a shaft seal.

In addition, these products have a simpler and more compact structure than pumps which have external drive magnets.

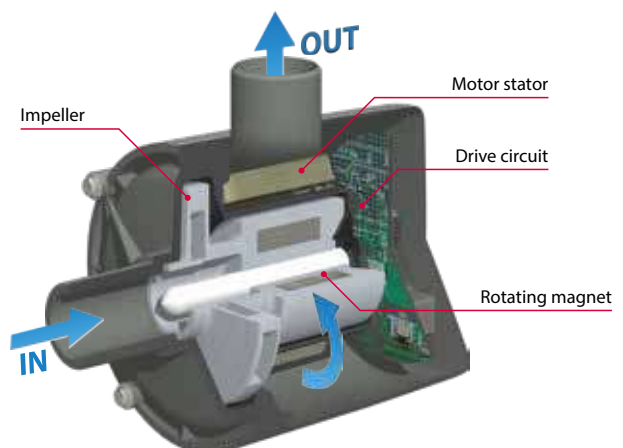

# Extensive Product Range for a Wide Variety of Uses

The NRD series has large selection of models offer a wide flow range of 5.1 - 140L/min.


## Outline of the Series

Models	Max. Capacity (L/min)								Max. Head (m)					Limit of specic gravity
	20	40	60	80	100	120	140		5	10	15	20	25	
NRD-05	5.1								4.1					1.07
NRD-08	7.9								11.5					1.07
NRD-08Z(-P)	8								19					1.07
NRD-12	13.6								7.4					1.07
NRD-20	19.5								8.5					1.0
NRD-30	23.5								11					1.0
NRD-40	25								15					1.07
NRD-40X Large capacity type	70								6					1.07
NRD-70	55								19.1					1.07
NRD-70X Large capacity type	112								9.3					1.07
NRD-100	64								22.2					1.07
NRD-100X Large capacity type	140								12.2					1.07
NRD-100H High head type	70								26					1.07







## Wet End Materials

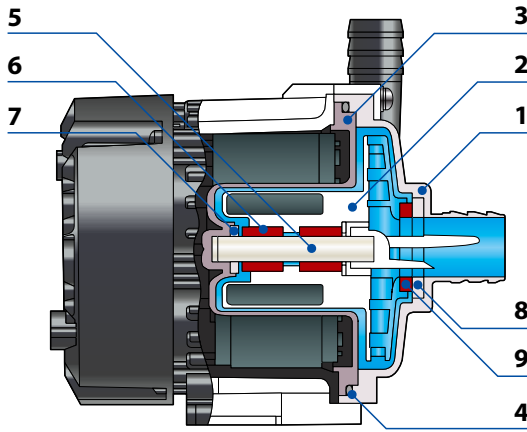

Model	NRD-05 to 30	NRD-40	NRD-70 to 100
1 Front casing	GFRPPE	GFRPPS	GFRPPS
2 Impeller	GFRPP		
3 Rear casing	GFRPPE		
4 O ring	FKM or EPDM		
5 Spindle	Alumina ceramic		
6 Bearing	Filled PTFE		
7 Thrust ring	Alumina ceramic		
8 Liner ring	-	-	Alumina ceramic
9 Mouth ring	-	-	Filled PTFE

• Illustration shows model NRD-70/100. The structure varies slightly depending on the model.  
Also, NRD-05 to 40X models do not have liner rings or mouth rings.  
Please contact us for details.

## Performance Curves

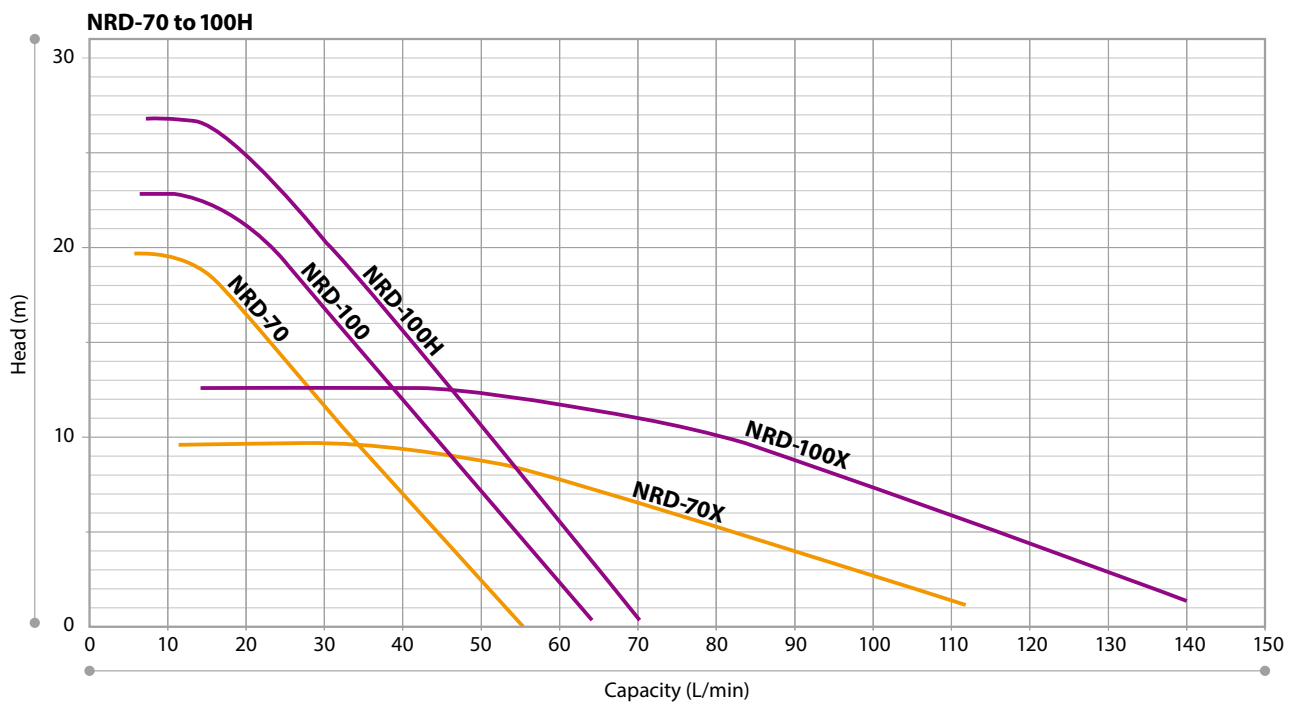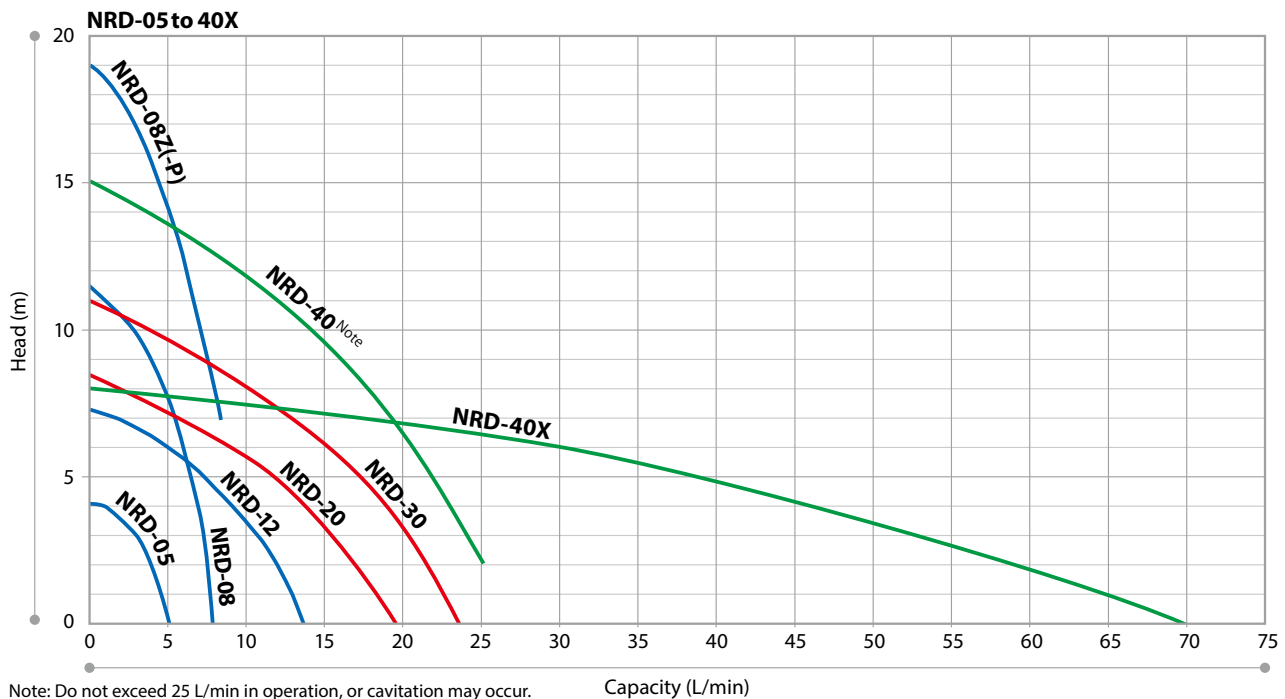

## Pump Identification

<div> <div>NRD</div> <div>-</div> <div>05</div> <div>T</div> <div>V</div> <div>24</div> <div>P4</div> <div>-</div> <div>R</div> <div>S</div> </div>									
1	2	3	4	5	6	7	8		
1 Pump series <b>NRD</b> Series			4 Material of O ring <b>V:</b> FKM <b>E:</b> EPDM			7 Pump connection port No code: Tube <b>R:</b> R Thread <b>N:</b> NPT Thread <b>G:</b> G Thread (NRD-40 to 100H only)			
2 Pump size <b>05, 08, 08Z, 12, 20, 30</b> <b>40, 40X, 70, 70X, 100, 100X, 100H</b>			5 Power voltage <b>24:</b> 24VDC <b>48:</b> 48VDC			8 Base type (NRD-05/08/08Z only) No code: Left and right direction mounting type (Left-to-right direction when viewed from pump front)			
3 Material of Bearing <b>T:</b> Filled PTFE			6 Control method No code: Variable external input (1 to 5VDC) <b>P4:</b> PWM input (NRD-08Z-P4 only) <b>P:</b> PWM input (NRD-70 to 100H only)			<b>S:</b> Custom type			

## Specifications

Model	Connection	Connection sizes (Outer diameter Ø)		Max. Capacity <sup>Note1</sup> L/min	Max. Head <sup>Note1</sup> m	Noise <sup>Note2</sup> dB	Limit of specif- ic gravity	Motor		Mass kg
		IN mm	OUT mm					Power voltage V	Output W	
NRD-05	Tube	14	8	5.1	4.1	Up to 40	1.07	DC24	6	0.4
	R Thread	R3/8	R1/8							
	NPT Thread	NPT3/8	NPT1/8							
NRD-08	Tube	14	8	7.9	11.5	Up to 45	1.07		22	0.4
	R Thread	R3/8	R1/8							
	NPT Thread	NPT3/8	NPT1/8							
NRD-08Z(-P)	Tube	14	8	8.0	19	Up to 45	1.07		33	0.4
	R Thread	R3/8	R1/8							
	NPT Thread	NPT3/8	NPT1/8							
NRD-12	Tube	18	18	13.6	7.4	Up to 45	1.07		17	0.4
	R Thread	R3/8	R3/8							
	NPT Thread	NPT3/8	NPT3/8							
NRD-20	Tube	21	17	19.5	8.5	Up to 55	1.0	28	1.2	
	R Thread	R1/2	R3/8							
	NPT Thread	NPT1/2	NPT3/8							
NRD-30	Tube	21	17	23.5	11	Up to 55	1.0	45	1.2	
	R Thread	R1/2	R3/8							
	NPT Thread	NPT1/2	NPT3/8							
NRD-40	Tube	27	21	25.0	15	Up to 55	1.07	85	1.5	
	R Thread	R1	R1/2							
	NPT Thread	NPT1	NPT1/2							
	G Thread	G1 · 1/2	G1 · 1/4							
NRD-40X (Large capacity type)	Tube	27	27	70.0	8	Up to 55		DC48	72	1.5
	R Thread	R1	R3/4							
	NPT Thread	NPT1	NPT3/4							
	G Thread	G1 · 1/2	G1 · 1/2							
NRD-70	Tube	25	19	55	19.1	Up to 55		135	2.7	
	R Thread	R1	R3/4							
	NPT Thread	NPT1	NPT3/4							
	G Thread	G1 · 1/2	G1 · 1/4							
NRD-70X (Large capacity type)	Tube	32		112	9.3		1.07	120		
	R Thread	R1 · 1/4								
	NPT Thread	NPT1 · 1/4								
	G Thread	G1 · 1/2								
NRD-100	Tube	25	19	64	22.2			165		
	R Thread	R1	R3/4							
	NPT Thread	NPT1	NPT3/4							
	G Thread	G1 · 1/2	G1 · 1/4							
NRD-100X (Large capacity type)	Tube	32		140	12.2	Up to 60		170		
	R Thread	R1 · 1/4								
	NPT Thread	NPT1 · 1/4								
	G Thread	G1 · 1/2								
NRD-100H (High head type)	Tube	25	19	70	26			195		
	R Thread	R1	R3/4							
	NPT Thread	NPT1	NPT3/4							
	G Thread	G1 · 1/2	G1 · 1/4							

Note1: The numerical values listed in the table represent the average performance values for when NRD series models are shipped from the factory. The individual differences between models may result in an error discrepancy of ±10%.

Note2: Noise was measured at a location 1 meter away from pump front, using the A scale.

• Test performance using clear water at room temperature.

• The maximum discharge rate is the discharge rate for when the pump head is at 0 meters and the maximum pump head is based on the shut-off total head.

• The viscosity limit of the working fluid is up to 1.0 mPa·s (with specific gravity of NRD-05/08/08Z/12/40/40X: 1.07, NRD-20/30: 1.0).


• Specifications/Environmental conditions

NRD-05/08/12/40/40X:	Ambient temperature: 0 to 50°C, Working liquid temperature: 0 to 80°C, Relative humidity: 35 to 85%RH
NRD-08Z:	Ambient temperature: 0 to 40°C, Working liquid temperature: 0 to 50°C, Relative humidity: 35 to 85%RH
NRD-40/40X:	Ambient temperature: 0 to 50°C, Working liquid temperature: 0 to 80°C, Relative humidity: 35 to 90%RH
NRD-70/70X/100/100X:	Ambient temperature: 0 to 50°C, Working liquid temperature: 0 to 80°C, Relative humidity: 35 to 90%RH
NRD-100H:	Ambient temperature: 0 to 50°C, Working liquid temperature: 0 to 70°C, Relative humidity: 35 to 90%RH

Please note that the above conditions vary depending on working liquid and heat cycle specifications.

## Dimensions in mm

NRD-05/08/08Z(-P)/12

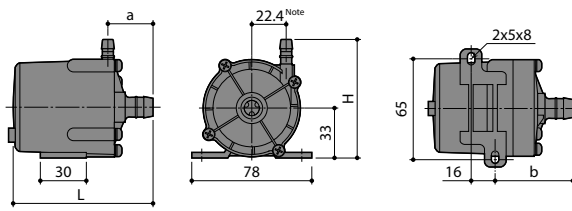


Connection	H	L	a	b
Tube	78(84)	91(92.5)	29.5(31)	50.5(52)
R Thread	75.5(84)	90.5(92.5)	29(31)	50(52)
NPT Thread	75.5(84)	90.5(92.5)	29(31)	50(52)

Note: NRD-12 is 21mm.

• ( ) dimensions are NRD-12.


• Dimensions are Right and left direction mounting type.

NRD-20/30

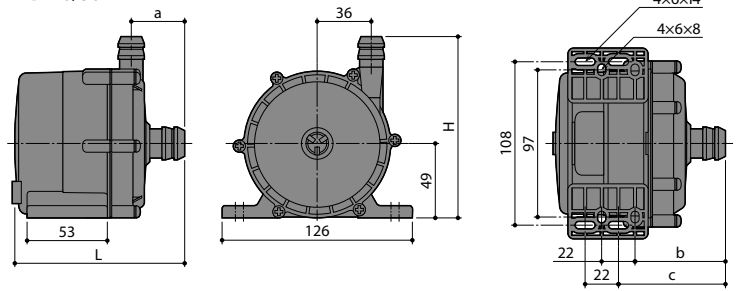


Connection	H	L	a	b	c
Tube	(119)	(112)	35	(59.5)	(70.5)
R Thread	(115)	(107)	30	(54.5)	(65.5)
NPT Thread	(115)	(107)	30	(54.5)	(65.5)

NRD-40/40X

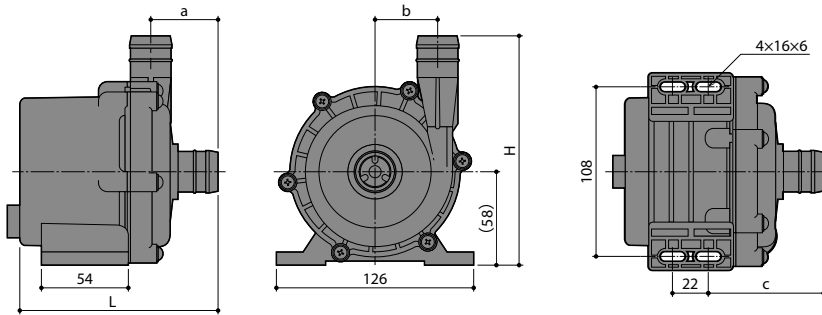

Model	Connection	H	L	a	b	c
NRD-40	Tube	(139)	(130)	(44)	37	(75)
	R Thread	(133)	(130)	(44)	37	(75)
	NPT Thread	(133)	(130)	(44)	37	(75)
	G Thread	(138)	(123)	(36.5)	37	(67.5)
NRD-40X	Tube	(143)	(130)	(42)	40	(75)
	R Thread	(134)	(130)	(42)	40	(75)
	NPT Thread	(134)	(130)	(42)	40	(75)
	G Thread	(138)	(125)	(36.5)	40	(70)

NRD-70/70X/100/100X/100H

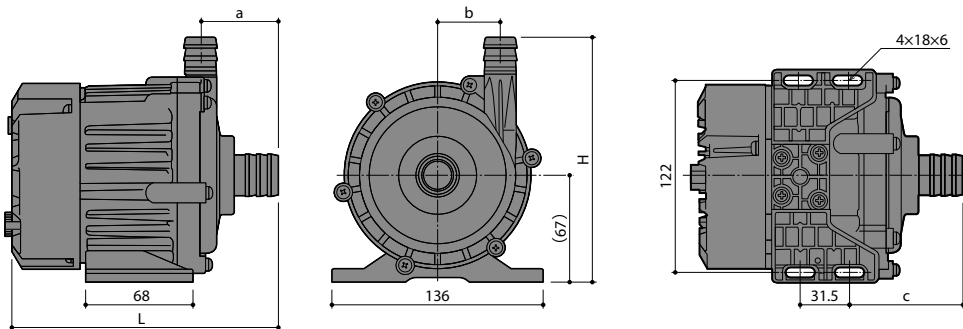

Model	Connection	H	L	a	b	c
NRD-70/100	Tube	(155)	(170)	48.9	41	(74)
	R Thread					
	NPT Thread					
	G Thread					
NRD-70X/100X	Tube	(162)	(174)	52.6	42	(78)
	R Thread					
	NPT Thread					
	G Thread					
NRD-100H	Tube	(155)	(170)	48.9	41	(74)
	R Thread					
	NPT Thread					
	G Thread					


**IWAKI CO., LTD.** 6-6 Kanda-Sudacho 2-chome Chiyoda-ku Tokyo 101-8558 Japan TEL : (81)3 3254 2935 FAX : 3 3252 8892


IWAKI has global net work.  
Please find your distributor location at

**www.iwakipumps.jp**

European Headquarter	<b>IWAKI Europe GmbH</b>	TEL: (49)2154 9254 0	FAX: (49)2154 9254 48	U.S.A.	<b>IWAKI America Inc.</b>	TEL: (1)508 429 1440	FAX: (1)508 429 1386
Germany	<b>IWAKI Europe GmbH</b>	TEL: (49)2154 9254 50	FAX: (49)2154 9254 55	Brazil	<b>IWAKI Do Brasil Comercio De Bombas Hidraulicas LTDA.</b>	TEL: (55)19 3244 5900	FAX: (55)19 3244 5900
The Netherlands (Netherlands Branch)	<b>IWAKI Europe GmbH</b>	TEL: (31)74 2420011	FAX: (49)2154 9254 48	China (Shanghai)	<b>IWAKI Pumps (Shanghai) Co., Ltd.</b>	TEL: (86)21 6272 7502	FAX: (86)21 6272 6929
Italy (Italy Branch)	<b>IWAKI Europe GmbH</b>	TEL: (39)0445 561219	FAX: (39)0445 569088	China (Hong Kong)	<b>IWAKI Pumps Co., Ltd.</b>	TEL: (852)2607 1168	FAX: (852)2607 1000
Spain (Spain Branch)	<b>IWAKI Europe GmbH</b>	TEL: (34)934 741 638	FAX: (34)934 741 638	China (Guangzhou)	<b>GFTZ IWAKI Engineering &amp; Trading Co., Ltd.</b>	TEL: (86)20 84350603	FAX: (86)20 84359181
Poland (East Europe Branch)	<b>IWAKI Europe GmbH</b>	TEL: (48)12 347 0755	FAX: (48)12 347 0900	Singapore	<b>IWAKI Singapore Pte Ltd.</b>	TEL: (65)6316 2028	FAX: (65)6316 3221
Denmark	<b>IWAKI Nordic A/S</b>	TEL: (45)48 242345		Indonesia (Indonesia Office)	<b>IWAKI Singapore Pte Ltd.</b>	TEL: (62)21 6906606	FAX: (62) 21 6906612
Finland	<b>IWAKI Suomi Oy</b>	TEL: (358)10 201 0490		Malaysia	<b>IWAKim SDN. BHD.</b>	TEL: (60)3 7803 8807	FAX: (60)3 7803 4800
Norway	<b>IWAKI Norge AS</b>	TEL: (47)23 38 49 00		Korea	<b>IWAKI Korea Co.,Ltd.</b>	TEL: (82)2 6238 4800	FAX: (82)2 6238 4801
Sweden	<b>IWAKI Sverige AB</b>	TEL: (46)8 511 72900		Taiwan	<b>IWAKI Pumps Taiwan Co., Ltd.</b>	TEL: (886)2 8227 6900	FAX: (886)2 8227 6818
Belgium	<b>IWAKI Belgium N.V.</b>	TEL: (32)13 670200	FAX: (32)13 672030	Thailand	<b>IWAKI (Thailand) Co.,Ltd.</b>	TEL: (66)2 322 2471	FAX: (66)2 322 2477
France	<b>IWAKI France S.A.</b>	TEL: (33)1 69 63 33 70	FAX: (33)1 64 49 92 73	Australia	<b>IWAKI Pumps Australia Pty Ltd.</b>	TEL: (61)2 9899 2411	FAX: (61)2 9899 2421

( ) Country codes

 **Caution for safety use:**  
Before use of pump, read instruction manual carefully to use the product correctly. Actual pumps may differ from the photos. Specifications and dimensions are subject to change without prior notice. For further details please contact us.

 **Legal attention related to export.** Our products and/or parts of products fall in the category of goods contained in control list of international regime for export control. Please be reminded that export license could be required when products are exported due to export control regulations of countries. The posting and copying from this catalogue without permission is not accepted firmly.